

Carrier Air Cooled Chiller - 110 Tons


Mfg: Carrier



Model: 30GTN110 620KA

Stock No: ABCC01

Serial No: 2202F57352

Carrier Air Cooled Chiller. Model: 30GTN110 620KA. Serial No: 2202F57352. Rated nominal cooling capacity: 110 tons. Refrigerant: R-22. (4) Carlyle compressors. Models: 06EF299610 and 06E6265610: 400/460V, 50/60Hz, 3 phase. (8) fans, 6 blades, 30 in. diameter, 950 rpm, 76000 cfm (6) at 2 hp, (2) 1.7 hp, 460V, 60 Hz, 3 phase. Control power supply: 115V, 30 amps, 60 Hz, 1 phase. Comfort Link™ control panel enabling a cable ready connection to a Carrier Comfort Network(CCN). Approximate shipping weight: 8600 lbs. Overall dimensions: 14 ft. 7 in. L x 8 ft. W x 8 ft. 2 in. H.

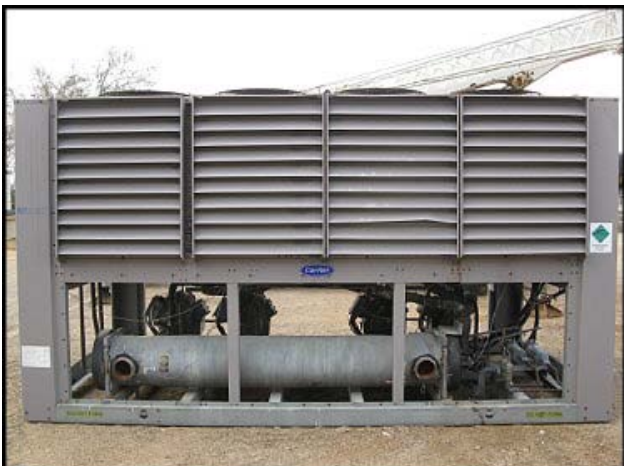

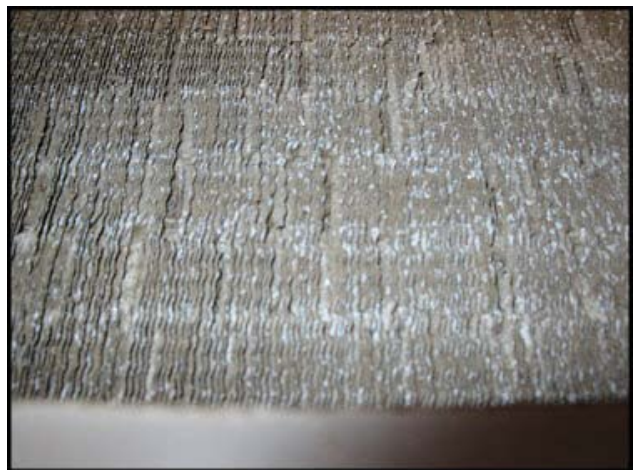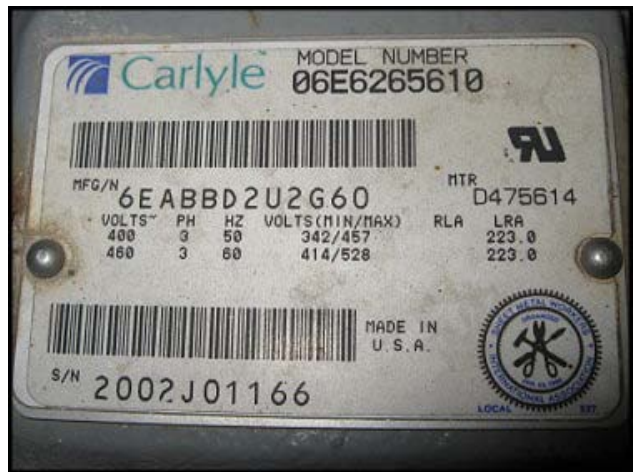



Carrier		30GTN110---620KA		Carrier	
A United Technologies Company		2202F57352			
MODEL	30GTN110---620KA	SERIAL	2202F57352	FACTORY CHARGED	
COMP	2	VOLTS AC	460	PH	3
COMP	1	VOLTS AC	460	PH	3
COMP	1	VOLTS AC	460	PH	3
DESIGN / TEST PRESSURE GAGE		HIGH	PSI	450	MPa
FAN MOTORS		QTY	VOLTS AC	PH	HZ
OUTDOOR		6	460	3	60
OUTDOOR		2	460	3	60
OTHER					
HEATERS					
TOTAL		V/L SUITABLE FOR OUTDOOR USE			
POWER SUPPLY	460	VOLTS	3	PH	60
MINIMUM CIRCUIT AMPS	241.2	MAX OVERCURRENT PROTECTION DEVICE AMPS	300	FUSE OR HACR TYPE CIRUIT BREAKER	
CONTROL POWER SUPPLY	115	VOLTS	1	PH	60
MINIMUM CIRCUIT AMPS	2	MAX OVERCURRENT PROTECTION DEVICE AMPS		FUSE OR HACR TYPE CIRUIT BREAKER	
MADE IN U.S.A.	TLF	CHARGE SYSTEM PER INSTALLATION INSTRUCTIONS	09NA504514 E	57B9	LISTED

