

Carrier Air Cooled Chiller – 110 Tons

Mfg: Carrier





Model: 30GTN110620KA


Stock No: ABCC02

Serial No: 2202F57326

Carrier Air Cooled Chiller. Model: 30GTN110 620KA. Serial No: 2202F57326. Rated nominal cooling capacity: 110 tons. Refrigerant: R-22. (4) Carlyle compressors. Models: 06EF275610 and 06E6265610: 400/460V, 50/60Hz, 3 phase. (8) fans, 6 blades, 30 in. diameter, 950 rpm, 76000 cfm (6) at 2 hp, (2) 1.7 hp, 460V, 60 Hz, 3 phase. Control power supply: 115V, 30 amps, 60 Hz, 1 phase. Comfort Link™ control panel enabling a cable ready connection to a Carrier Comfort Network(CCN). Overall dimensions: 14 ft. 7 in. L x 8 ft. W x 8 ft. 2 in. H.



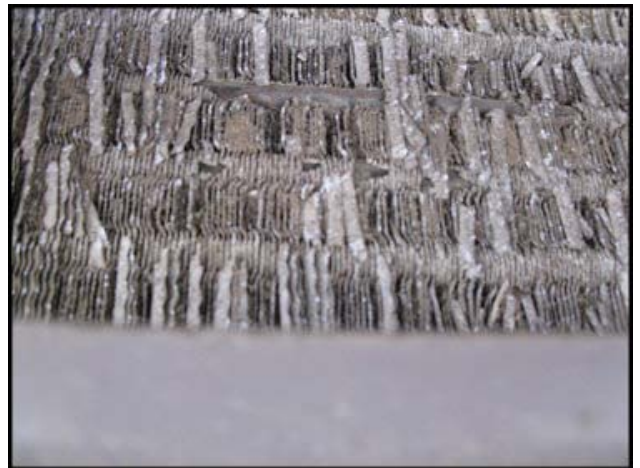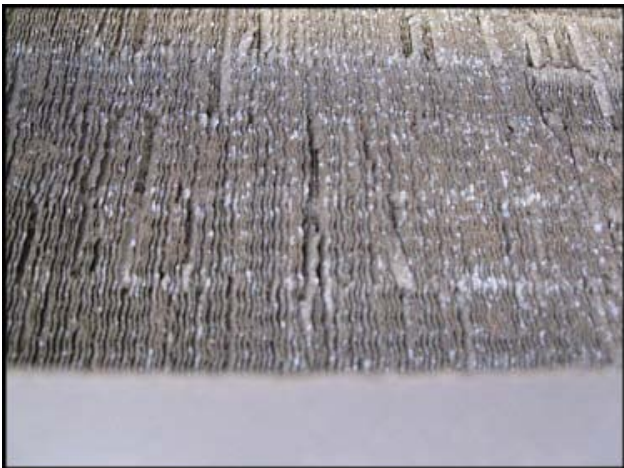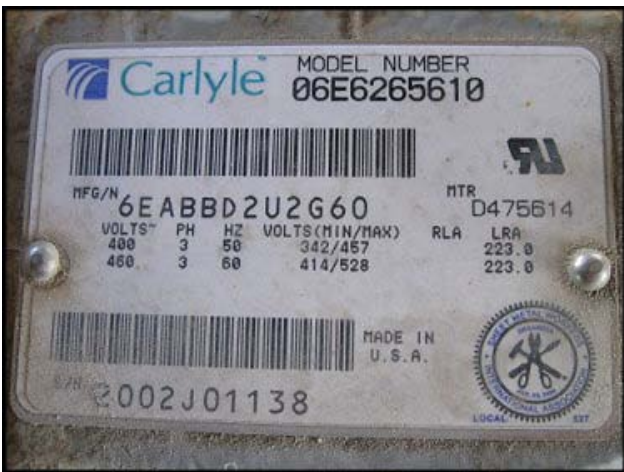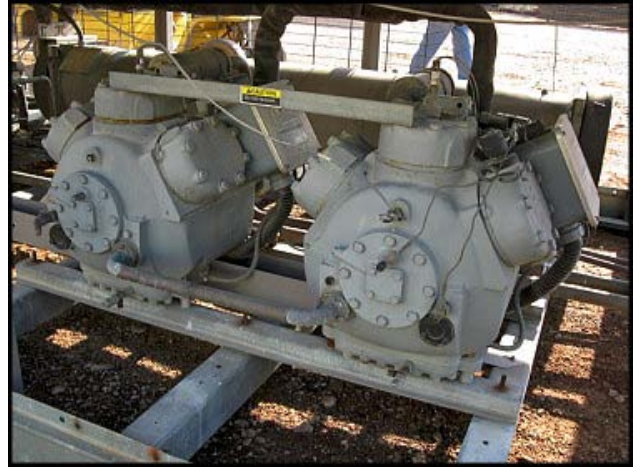

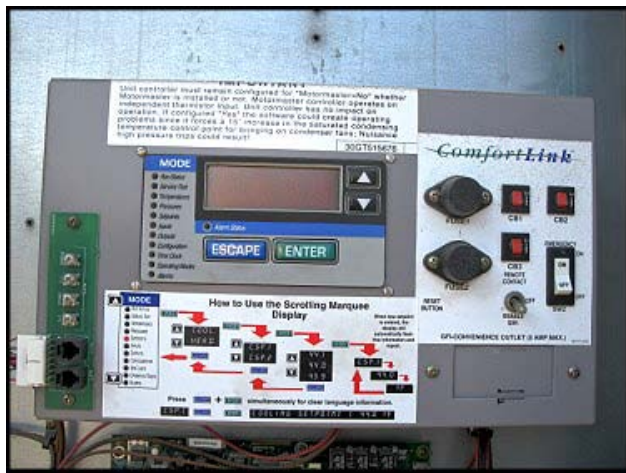

Carrier		30GTN110---620KA		Carrier							
A United Technologies Company		SERIAL 2202F57326		FACTORY CHARGED							
MODEL	30GTN110---620KA	QTY	2	FLA	43.6	LRA	223	REFRIG. SYSTEM	R-22		
COMP	460	VOLTS AC	3	PH	60	HZ	46.8	98	LBS 44.5 kg		
COMP	460	VOLTS AC	3	PH	60	HZ	46.8	105	LBS 47.7 kg		
COMP	460	VOLTS AC	3	PH	60	HZ	46.4	345			
DESIGN / TEST PRESSURE GAUGE		HIGH	PSI	450	KPa	3102	LOW	PSI	278	KPa	1917
FAN MOTORS		QTY	VOLTS AC	PH	HZ	FLA	HP	KW OUT			
OUTDOOR		6	460	3	60	3.3	2.0	1.5			
OUTDOOR		2	460	3	60	2.8	1.7	1.2			
OTHER											
WEIGHTS		TOTAL		OIL DUTABLE FOR OUTDOOR USE							
POWER SUPPLY		460	VOLTS	3	PH	60	HZ	CKT	MIN CIRCUIT AMPS	MAX OVERCURRENT PROTECTION DEVICE AMPS	
OVERCURRENT PROTECTION		506	MAX	414	MIN	1	241.2	300	FUSE OR HACR TYPE CIRCUIT BREAKER		
CONTROL POWER SUPPLY		115	VOLTS	1	PH	60	HZ	30	AMPS	2	
MFG. NO.		DATE		OUTDOOR UNIT		PART NO.		30M4504514 E			